

SIMPLE TO INSTALL

LIGHT-FLEX

Skylight fall-through protection system



The flexible LIGHT-FLEX collective fall protection system from INNOTECH can be implemented in any desired dimensions, and is a robust solution for very varied types of skylights and strip lights.


- Flexible fall-through protection for open and enclosed skylights
- Especially also for the protection of strip lights
- Simple to install or retrofit
- Variable size adjustment even during the installation
- Variable section sizes for opening mechanism

The system is a winner because installation is quick and straightforward, and is possible on wood, concrete, steel, and plastic.

- Also for smoke/heat extraction systems
- Express delivery available upon request
- High permeability to light and smoke
- Certification to the latest state of the art:

GS-BAU-18
EN 1873:2016
EN 14963:2006

LIGHT-FLEX

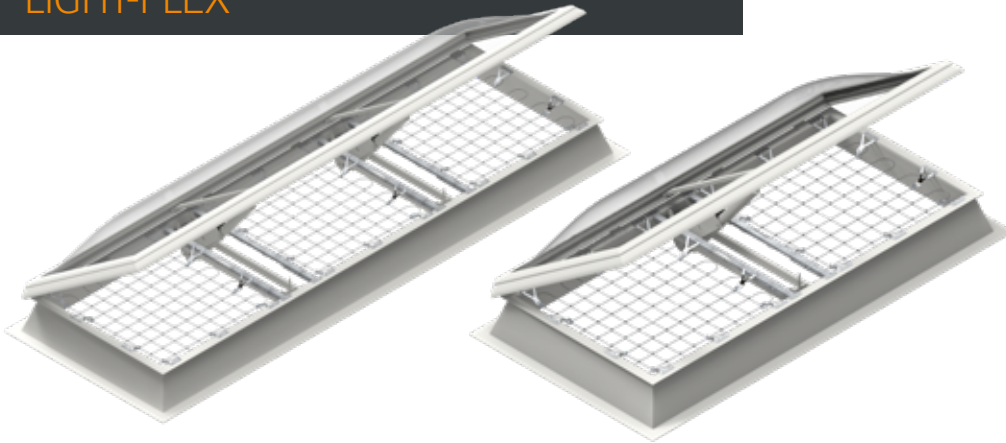

LIGHT | SKYLIGHT PROTECTION SYSTEM

LIGHT-FLEX-NET-01

SKYLIGHT FALL-THROUGH PROTECTION SYSTEM

Material: galvanised steel
Mesh width: max. 100 x 100 mm



High light and smoke permeability - straightforward installation and easy retrofitting

LIGHT-FLEX-KARI

SCREW CARABINER FOR LIGHT-FLEX-BEF-01

Material: galvanised steel
Load capacity: 125 kg



LIGHT-FLEX-RWA-01

STIFFENING RAIL FOR LIGHT-FLEX-BEF-0

Material: galvanised steel
Adjustment ranges:
1165 mm: 800 to 1165 mm
1525 mm: 1150 to 1525 mm
1900 mm: 1525 to 1900 mm



Stiffening rail for LIGHT-FLEX-NET-01 for skylights with smoke and heat extraction system

LIGHT-FLEX-BEF-01

FASTENING HOLDER FOR LIGHT-FLEX

Material: galvanised steel
Length: 130 mm
Width: 90 mm



LIGHT-FLEX-BEF-02

FASTENING HOLDER FOR LIGHT-FLEX, PRE-CANTED

Material: galvanised steel
Length: 136 mm
Width: 90 mm




SKYLIGHT PROTECTION SYSTEM

LIGHT-FLEX-BEF-40

BEAM CLAMP FOR LIGHT-FLEX-BEF-01

Material: galvanised steel
Flange thickness: 5 to 26 mm



HILTI MAB-13 beam clamp for LIGHT-FLEX-BEF-01
Available only upon request

*VARIABLE SIZE ADJUSTMENT EVEN
DURING THE INSTALLATION
HIGH PERMEABILITY TO LIGHT
AND SMOKE
ESPECIALLY FOR
THE PROTECTION OF ROOF LIGHTS*

LIGHT-FLEX / skylight fall-through protection